

TH SERIES FREEZE THAW CHAMBERS

TH Series Overview

The TH series chambers are our state-of-the-art freeze/thaw chambers used for a variety of applications. Controls can be quickly exchanged for future upgrades or repairs.

TH011

The TH011 is a bench top freeze thaw chamber designed to fit on 24" benchtops or stacked with optional racking.

TH030

The TH030 is a single-door freeze thaw chamber.

TH055

The TH055 is a 2-door freeze thaw chamber.

TH068

The TH068 is a larger 2-door freeze thaw chamber.

TH084

The TH084 is a three-door freeze thaw chamber.



TH SERIES: FREEZE THAW CHAMBERS

Performance

Range -25 C to 50°C, temperature control $\pm 0.2^\circ\text{C}$ (non-defrost), temperature uniformity $\pm 0.7^\circ\text{C}$ (non-defrost).
Approximate ramping ability is as follows 1°C per 2 minutes from -23°C to +23°C and back, unloaded. Note: Some defrost tolerance may be required for extended operation (more than 48 hours) below 4°C.

Greatly Reduced Direct and Indirect Energy Loads

The TH Series freezers utilize less energy than comparable freeze thaw chambers and introduce less impact upon building cooling systems.

Options Available

- Extended Temperature Range**
- Chart Recorders
- Data Loggers
- Pneumatic & Desiccant Wheel Dryers**
- Window or Glass door. **
- Full swinging interior glass door
- Magnetic latch door handle with lock and two keys (011 and 034 models)
- Touch Screen interface
- Headless interface (Virtual Touch Screen VTS)
- Other control Options or monitoring i.e., CO₂.
- Adjustable Fan Speeds. **
- Air exchanges filtered or non-filtered with ambient space. **
- Condensate drain pumps.
- Interior or exterior electrical outlets. (Limited power) **
- Stainless Steel Exterior (030, 055 and 084)
- Humidity**
- 5 gallon carboy (if no hookup to waterline available)
- Door ajar alarm

***Some Options may limit chamber performance less or greater than specified here.*

Widely Proven, Non-Proprietary Controllers

Standard controllers for the TH Series are manufactured by Fuji Electric and are ideal for laboratory freezers. Unlike many proprietary controllers, this controller is commercially available and proven in tens of thousands of installations. Standard functions include: autotuning, fuzzy logic, PID control, programmable alarms, calibration capability, ramp/soak, offset capability, etc. A touchscreen control interface is optional. Other controller manufacturers are also supported (Watlow, Allen-Bradley etc.)

Services and Warranties


We offer technical support throughout the lifetime of your freezer. In addition to standard warranties, we also offer extended warranties for cooling components, parts, and labor. We also provide qualifications, validations, and preventive maintenance services at an additional cost. Please ask for a quote.

Refrigeration System

The TH Series provides an oversized and balanced, environmentally friendly R404A refrigeration system, epoxy coated evaporator. Along with an automatic evaporator fan motor delay during defrost.

TH Series Freeze Thaw Chamber Specifications (ambient 23° C)

		Temperature	
Performance	Standard	Optional	
Temperature Range	-25° C to 50° C	Available	
Ambient Temperature	21° C ± 3° C		
Temperature Control	± 0.2° C		
Temperature Uniformity	± 0.7° C		
Control Resolution	0.1° C		
Temperature Sensor Type	3 wire PT100 Class A RTD		

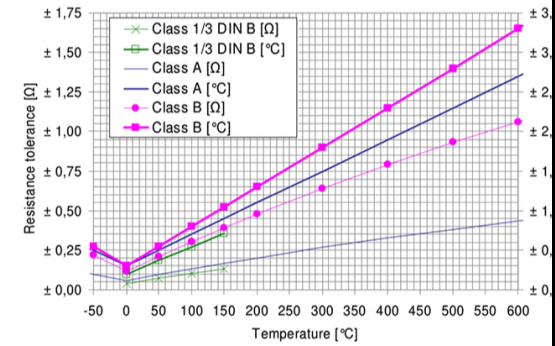


Optional Humidity		
Performance	Standard Option	Optional
Humidity Range	Ambient Absolute Humidity* to 90% Relative Humidity @ 42°C Dewpoint	2 to 95% @ 22° C (or other ranges)
Humidity Control	± 0.3%	
Humidity Uniformity	± 2 %	
Control Resolution	0.1%	
Humidity Sensor	<p>Rotronic HC2A-S Operating range -50...100 °C / 0...100 %RH Accuracy: ±0.8 %RH, ±0.1 K, at 23 °C ±5 K Digital interface (UART) and scalable analogue outputs, 0...1 V</p> <p>RH Sensor Accuracy Overview</p>	Vaisala or other

*Absolute Humidity is the amount of moisture in the air in a particular environment.


The humidity chart below shows the chamber's humidity capabilities.

How to read the chart below:

The Humidity% Line in red is the max humidity level that can be achieved by staying within the 42°C dew point. Humidity levels above this line are not recommended. The Humidity Low line in green is the lowest the chamber can go without the use of a dryer. This is based on ideal performance and ambient condition of 23°C and 50% RH. Lower or higher ambient conditions will impact the lower humidity capabilities of your chamber. If your set points are near this line or below it is recommended to add dryer capabilities to your chamber. The Dryer Line in purple represents the use of a pneumatic dryer with a -40 Dew Point. To reach such low humidity, a constant supply of dry air is needed, and manual adjustment to humidity valve may be needed. Alternatively, if low %RH (low dewpoint) is desired but dry compressed air is not available, other dryer types are available.

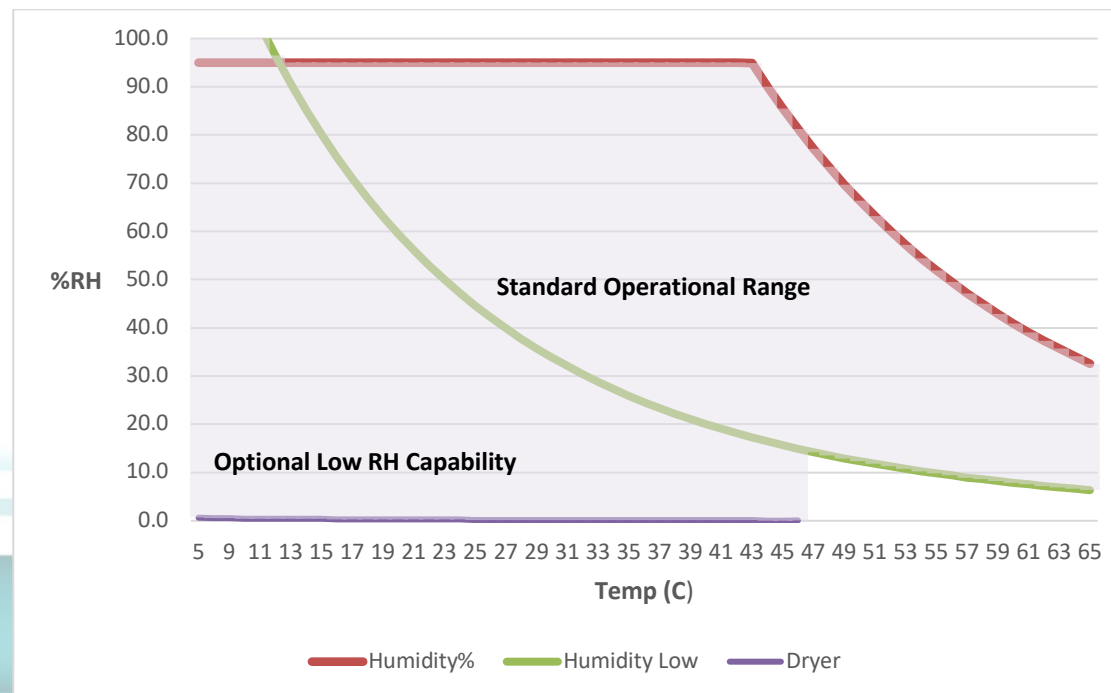


*Humidity% represents chamber performing at 42°C Dew point.
 Humidity Low represents absolute humidity at ambient space of 23°C and 50%RH.*




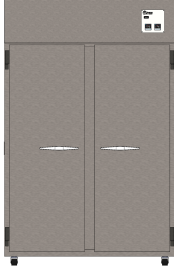

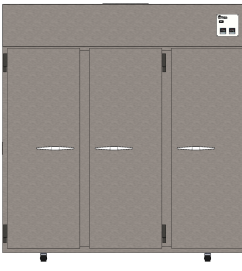
Control System	Standard	Optional
Controller	Fuji PXF4	VTS (Virtual Touchscreen), Gefran 650, Future Design Controls CM and MCT4 + More
Control Readout	Actual and Set-Point Values 	Trending, Duty Cycle
Indication Accuracy	RTD input: $\pm 0.2\%$ of indication value ± 1 digit or $\pm 0.5^\circ\text{C} \pm 1$ digit, whichever is larger	Dependent on optional Controller
Sample Rate	Fast as 50 ms	Dependent on optional Controller
Control Speed	Fast as 100 ms	Dependent on optional Controller
Control Type	PID - Fuzzy Logic (9 types available)	Dependent on optional Controller
Auto Tuning	YES	Dependent on optional Controller
Calibration Correction Capability	± 0.1 lower and upper scale	Dependent on optional Controller
Uniformity Off Set	± 0.1 Resolution Linear adjustment	± 0.1 Resolution
Alarm	High / Low Audible and Visual	Text, Email, Web Server, Remote Access
Alarm Type	High / Low Deviation in 0.1 resolution with adjustable Delay. Control audible alarm enable or disable components.	Absolute & Deviation 0.1 Resolution with Delay
Remote Monitoring / BMS connection	Double throw Dry Contact Alarm, RS 485 MODBUS RTU / ASCII**	Ethernet & Analog Output (Specify voltage or mA)
Password Protection	Hexadecimal	Numeric, Alpha Numeric
Audit Trail	Not Standard*	Dependent on optional Controller
Universal Power Supply for Monitoring	Not Standard	Available. <i>Controllers and sensors powered during outage for data logging. Chamber operation not supported.</i>
Ramp Soak Function	Up to 64 steps. A Step includes a ramp and soak. Up to 8 patterns / programs (recipes).	Dependent on optional Controller

*Applies with touchscreen or VTS option.

**For BACNET or MODBUS TCP (Ethernet) please contact your BMS vendor about using a gateway to interface with controllers via the RS485.

	TH011	TH030	TH034	TH055	TH068	TH084
TH						
Construction						
Exterior	Powder Coated Finish	Stainless Steel Front continuous coil coated steel sides	Powder Coated Finish	Stainless Steel Front continuous coil coated steel sides	Powder Coated Finish	Stainless Steel Front continuous coil coated steel sides
Exterior Material Thickness	Heavy Gauge	Medium Gauge	Heavy Gauge	Medium Gauge	Heavy Gauge	Medium Gauge
Interior	304 Stainless Steel	Coated Aluminum	304 Stainless Steel	Coated Aluminum	304 Stainless Steel	Coated Aluminum
Interior Material Thickness	.036"	Medium Gauge	.036"	Medium Gauge	.036"	Medium Gauge
Door QTY	1	1	1	2	2	3
Door Lock	Optional	Tumbler Cam Key Lock	Optional	Tumbler Cam Key Lock	Optional	Tumbler Cam Key Lock
Door Swing	+180°	120° Stay Open Feature	+180°	120° Stay Open Feature	+180°	120° Stay Open Feature
Door Gasket	Magnetic Gasket	Snap in Magnetic Gasket	Magnetic Gasket	Snap in Magnetic Gasket	Magnetic Gasket	Snap in Magnetic Gasket
Shelving Material	304 Stainless Steel	Epoxy Coated	304 Stainless Steel	Epoxy Coated	304 Stainless Steel	Epoxy Coated
Shelf Quantity per Door	2	3	3	3	3	3
Casters Height	2.75"	3"	2.75"	3"	2.75"	3"
Caster QTY	4	4	4	4	5	4
Caster Locking Brakes	2	2	2	2	2	2
Access Port Qty	2	2	2	2	2	2
Multi-Purpose ports	YES	YES	YES	YES	YES	YES

Continuous coil coated is treated metal before it is cut and formed, the entire surface is cleaned and treated, providing tightly bonded finish. Formed sides have holes, valleys, recessed areas, and hidden areas that make it difficult to clean and uniformly coat. Coil coated metal is often considered more durable and corrosion resistant than most painted metal as it is treated before shaped.

	TH011	TH030	TH034	TH055	TH068	TH084
TH						
Capacity & Dimensions						
NET Capacity*	9.2 ft ³	22.1 ft ³	29.0 ft ³	48.2 ft ³	62.6 ft ³	74.3 ft ³
Conditioned Space	11.6 ft ³	23.9 ft ³	32.1 ft ³	50.0 ft ³	69.3 ft ³	76.2 ft ³
External Dimensions**	36.2W x 27.4D x 47.1H	26W x 32D x 78.75H	35.7W x 33.8D x 80.8H	52W x 32D x 78.75H	68.4W x 34.2D x 81.8H	78W x 32D x 78.75H
Internal Dimensions**	29.7W x 23.6H x 22.6D	22W x 28D x 62H	29.4W x 29.0D x 57.3H	48W x 28D x 62H	64.2W x 29.4D x 57.3H	74W x 28D x 62H
Access Port Dimensions	2" ID with Foam Insert	2" ID with Foam Insert	2" ID with Foam Insert	2" ID with Foam Insert	2" ID with Foam Insert	2" ID with Foam Insert
Recommended Clearance	Top 12"	Top 12"	Top 12"	Top 12"	Top 12"	Top 12"
	Rear 6"	Rear 6"	Rear 6"	Rear 6"	Rear 6"	Rear 6"
	Sides 6"	Sides 6"	Sides 6"	Sides 6"	Sides 6"	Sides 6"
Shelf Dimensions	28.9W x 20.4D	21.25W x 24.6D	28.75W x 26D	22.75W x 22.75D	31.4W x 24.25D	24W x 22.75D
Shelf Weight Capacity	150 lbs.	90 lbs.	150 lbs.	90 lbs.	150 lbs.	90 lbs.
Approx. Max Storage weight	600	500	700	1000	1000	1500
Approx. Crated Weight	470 lbs.	526 lbs.	765 lbs.	740 lbs.	1100lbs	1100 lbs.

	TH011	TH030	TH034	TH055	TH068	TH084
TH						
Components						
Compressor Size	1/2 hp	1/2 hp	1/2 hp	1 hp	1 hp	2* 1/2 hp
Refrigerant	R404a	R404a	R404a	R404a	R404a	R404a
Charge (oz)	13.5 oz	13.5 oz	13.5 oz	13.5 oz	13.5 oz	13.5 oz
Defrost	Standard – adjustable duration and frequency	Standard – adjustable duration and frequency	Standard – adjustable duration and frequency	Standard – adjustable duration and frequency	Standard – adjustable duration and frequency	Standard – adjustable duration and frequency
Heater Watt Size	350	500	350	500	500	500 (1000)
Heater Qty	1	1	1	1	1	2
Perimeter Heater	YES	YES	YES	YES	YES	YES
Air flow direction	Front to Back	Front to Back	Front to Back	Front to Back	Front to Back	Front to Back
Fan Count	3	1	3	1	6	1
Fan CFM per fan	125	Up to 600	125	Up to 600	125	Up to 600
Variable Speed	Manual Adjust	Manual Adjust	Manual Adjust	Manual Adjust	Manual Adjust	Manual Adjust
Humidity	Optional	Optional	Optional	Optional	Optional	Optional
Water quality	A conductivity of 0.1 μS – 10 μS (Micro Siemens), TDS (Total Dissolved Solids) of less than 10 PPM (Parts per Million), and 1-10 PSI (Pounds per Square Inch) of supply water pressure. ¼" poly tube push to connect fitting for water connection.					
Max Water consumption	1200 ml / 0.32 Gal per Hour	1200 ml / 0.32 Gal per Hour	1200 ml / 0.32 Gal per Hour	1200 ml / 0.32 Gal per Hour	1200 ml / 0.32 Gal per Hour	1200 ml / 0.32 Gal per Hour
Water Connection	¼" poly tube push to connect	¼" poly tube push to connect	¼" poly tube push to connect	¼" poly tube push to connect	¼" poly tube push to connect	¼" poly tube push to connect
** Optional Compressed Dry Air **						
Max use 70 PSI & 200 CFH. ¼" poly tube push to connect fitting. Recommend Compressed Dry air of -40°C Dew point.						

	TH011	TH030	TH034	TH055	TH068	TH084						
TH												
Electrical North America												
Voltage	115 VAC/ 60 Hz										115/208-230 VAC /60HZ Chamber & 115 VAC /60Hz Dryer NEMA L14-20P	
RLA	10		10		10		12.0		12.0		12.0	
Heat Rejection	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High
	1023 Btu/h	3921 Btu/h	1023 Btu/h	3921 Btu/h	1023 Btu/h	3921 Btu/h	1405 Btu/h	5102 Btu/h	1405 Btu/h	5102 Btu/h	2046 Btu/h	8011 Btu/h
Cord Length	9 ft		9 ft		9 ft		9 ft		9 ft		9 ft	
Dedicated Circuit	15 A		15 A		15 A		20 A		20 A		20 A	
Electrical International via Buck Boost Transformer												
Voltage	230 VAC/ 50 Hz											
RLA	5.0		5.0		5.0		6.0		6.0		6.0	
Heat Rejection	Low	High	Low	High	Low	High	Low	High	Low	High	Low	High
	1023 Btu/h	3921 Btu/h	1023 Btu/h	3921 Btu/h	1023 Btu/h	3921 Btu/h	1405 Btu/h	5102 Btu/h	1405 Btu/h	5102 Btu/h	2046 Btu/h	8011 Btu/h
Cord Length	2.74 m		2.74 m		2.74 m		2.74 m		2.74 m		2.74 m	
Accessory connections												
BMS Dry Contact	Screw terminal 3 position Common / Normally Closed / Normally Open											
RS485 MODBUS	1/8" or 2.5mm stereo input jack											
Optional Re transmission	Screw terminal											
Dry Air solenoid	Screw Terminal											
Desiccant Wheel Dryer	Twist lock 4 pin din connector											
Aux 24VDC output (500	5.2 mm Barrel Connector											

	TH011	TH030	TH034	TH055	TH068	TH084
TH						
mA limit)						

**Interior Capacity includes the 2" spacing from interior walls to allow for best air flow performance.*

***Include width with handle and height with casters installed.*

RLA and heat rejection is based on a controlled operation temperature of 30C and 65% RH. Value may change on operating set points.